

CCT Remote

Model No.: C3P

Product Feature


- 2.4GHz wireless transmitting technology , fast transmitting, stable signal and anti-interference
- Control multi devices at the same time
- Dim cct and brightness
- Support Miboxer/Milight 2.4G controller and light series
- Control Distance 30m
- Magnetic installation
- For commerical, hotel and home lighting




Product Parameter

Product Name: :	CCT remote	Working temperature :	-10~40°C
Model No.::	C3P	EMC standard(EMC):	ETSI EN 301 489-1 V2.2.3 ETSI EN 301 489-3 V2.3.2
Working voltage:	3V(AAA*2PCS)	Security Standard (LVD) :	EN 61347-2-11:2001+A1:2019 EN 61347-1: 2015+A1:2021 EN 62493:2015+A1:2022
Standby consumption:	15μA	Radio equipment (RED) :	ETSI EN 300 400 V2.2.1
Transmission:	6dBm	Certification:	CE、EMC、LVD、RED
Protocol:	2.4GHz RF		
Modulation:	GFSK		
Control Distance:	30M		


Remote



Remote Holder



Function

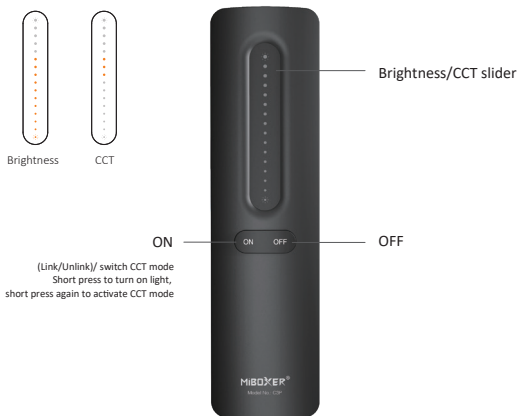

Function

Dim Brightness



Up and down to change brightness

Dim CCT


Turn on light and short press "ON" 1 time



Up and down to change color temperature

Link/Unlink


Link controller must link with remote before using it



Turn off light 10 seconds and turn on again



Short press "ON" 3 times within 3 seconds




Link is done once light flashes 3 times slowly



Link is failed if light doesn't flash, please repeat above steps
(Attention: can not link again if remote already finished linking)


Unlink



Turn off light 10 seconds and turn on again



Short press "ON" 5 times within 3 seconds




Link is done once light flashes 10 times quickly




Unlink is failed if light doesn't flash, please repeat above steps
(Attention: no need to unlink if the light never be linked)

Installation



Remove the sticker on the holder



Stick the holder on the wall and put remote on the holder

Attention:

1. To control MiBoxer/Mi-Light 2.4G series products , please refer to the product manual for compatibility.
2. Don't use it in humidity or high temperature area, please take out battery if don't use it frequently and keep it in dry or static electricity area
3. Don't use it near metal or strong magnetic area, it will affect signal and lost distance.

