









■ Features

- · Constant Current mode output
- · Plastic housing with Class II design
- · Built-in active PFC function
- · Class 2 power unit
- Standard type with IP30 level, optional IP67 with fully encapsulated
- Function: 3 in 1 dimming
- Typical lifetime>50000 hours
- 5 years warranty

■ Applications

- · LED downlight
- · LED spotlight
- LED decorative lighting
- · LED tunnel lighting


■ GTIN CODE

MW Search: https://www.meanwell.com/serviceGTIN.aspx

■ Description

LPF-16D series is a 16W AC/DC LED driver featuring the constant current output. LPF-16D operates from $90\sim305$ VAC and offers models with different rated voltage ranging between 12V and 54V. Thanks to the efficiency up to 85%, with the fanless design, the entire series is able to operate for $-35^{\circ}\text{C} \sim +70^{\circ}\text{C}$ case temperature under free air convection. The entire series is suitable to work for a variety of applications at dry or damp and the optional models with IP67 rating is able to further work at wet locations. LPF-16D is equipped with the 3 in 1 dimming function so as to provide the design flexibility for LED lighting system.

■ Model Encoding

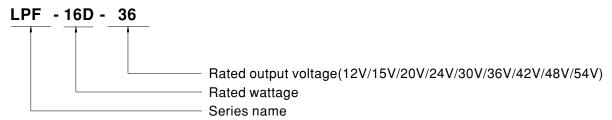

16W Constant Current Mode LED Driver

LPF-16D series


SPECIFICATION

PECIFICA ODEL	ATION	LPF-16D-12	LPF-16D-15	I PF-16D-20	LPF-16D-24	LPF-16D-30	LPF-16D-36	I PF-16D-42	LPF-16D-48	LPF-16D-54
	DOVOLTAGE	·			-					
-	DC VOLTAGE	12V	15V	20V	24V	30V	36V	42V	48V	54V
-	RATED CURRENT	1.34A	1.07A	0.8A	0.67A	0.54A	0.45A	0.39A	0.34A	0.3A
-	RATED POWER Note.5	16.08W	16.05W	16W	16.08W	16.2W	16.2W	16.38W	16.32W	16.2W
UTPUT (CONSTANT CURRENT REGION Note.2									
(CURRENT RIPPLE	5.0% max. @rated current								
(CURRENT TOLERANCE	±5.0%								
\$	SETUP, RISE TIME Note.6	1500ms, 80ms / 115VAC 500ms, 80ms / 230VAC								
H	HOLD UP TIME (Typ.)	16ms/230VAC 16ms/115VAC								
\	VOLTAGE RANGE Note.5	90 ~ 305VAC 127 ~ 431VDC (Please refer to "STATIC CHARACTERISTIC" section)								
F	FREQUENCY RANGE	47 ~ 63Hz								
F	POWER FACTOR	PF≥0.97/115VAC, PF≥0.95/230VAC, PF≥0.92/277VAC@full load (Please refer to "POWER FACTOR (PF) CHARACTERISTIC" section)								
1	TOTAL HARMONIC DISTORTION	THD< 20%(@load≧60%/115VC,230VAC; @load≧75%/277VAC) (Please refer to "TOTAL HARMONIC DISTORTION(THD)" section)								
PUT E	EFFICIENCY (Typ.)	83%	83%	84.5%	84.5%	84.5%	85%	85%	85%	84.5%
-	AC CURRENT	0.4A / 115VA			0.2A/277VAC	3 , 0	3070	30,0	100,0	0 70
-	INRUSH CURRENT(Typ.)									
-	() ()	COLD START 45A(twidth=200μs measured at 50% Ipeak) at 230VAC; Per NEMA 410								
C	MAX. No. of PSUs on 16A CIRCUIT BREAKER	14 units (circuit breaker of type B) / 24 units (circuit breaker of type C) at 230VAC								
L	LEAKAGE CURRENT <0.75mA / 240VAC									
	OVER CURRENT	95 ~ 108%								
9	SHORT CIRCUIT	Constant current limiting, recovers automatically after fault condition is removed Hiccup mode, recovers automatically after fault condition is removed.								
OTECTION	onort oncom	15 ~ 18V		23 ~ 27V	28 ~ 35V	34 ~ 40V	41 ~ 49V	46 ~ 54V	54 ~ 63V	59 ~ 66V
C	OVER VOLTAGE	Shut down and latch off o/p voltage, re-power on to recover							1	
C	OVER TEMPERATURE	Shut down o/p voltage, recovers automatically after temperature goes down								
٧	WORKING TEMP.	Tcase=-35 ~ +70°C (Please refer to "OUTPUT LOAD vs TEMPERATURE" section)								
-	MAX. CASE TEMP.	Tcase=+70°C								
_	WORKING HUMIDITY	20 ~ 95% RH non-condensing								
-	STORAGE TEMP., HUMIDITY	-40 ~ +80°C, 10 ~ 95% RH								
	TEMP. COEFFICIENT									
-		±0.03%/°C (0~50°C)								
\	VIBRATION	10 ~ 500Hz, 2G 12min./1cycle, period for 72min. each along X, Y, Z axes								
	SAFETY STANDARDS Note.8	UL8750, CSA C22.2 No. 250.0-08, ENEC BS EN/EN61347-1, BS EN/EN61347-2-13 independent, BS EN/EN62384, EAC TP TC 004, GB19510.1, GB19510.14 approved, IP67(optional); Design refer to UL60950-1								
AFEIT&	WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC								
ис 🛚	ISOLATION RESISTANCE	I/P-O/P:100M Ohms / 500VDC / 25℃ / 70% RH								
E	EMC EMISSION Note.8	Compliance to BS EN/EN55015,BS EN/EN61000-3-2 Class C (@load ≥ 55%) ; BS EN/EN61000-3-3,GB17743 and GB17625.1, EAC TP TC 020								
E	EMC IMMUNITY	Compliance to BS EN/EN61000-4-2,3,4,5,6,8,11; BS EN/EN61547, light industry level (surge immunity Line-Line 2KV),EAC TP TC 020								
	MTBF	3572.8K hrs min. Telcordia SR-332 (Bellcore); 391.6Khrs min. MIL-HDBK-217F (25℃)								
THERS [DIMENSION	148*40*32mm (L*W*H)								
F	PACKING	0.21Kg;40pcs	/9.4Kg/ 1.02C	UFT						
	 All parameters NOT specially mentioned are measured at 230VAC input, rated current and 25°C of ambient temperature. Please refer to "DRIVING METHODS OF LED MODULE". Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. Tolerance: includes set up tolerance, line regulation and load regulation. De-rating may be needed under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details. Length of set up time is measured at first cold start. Turning ON/OFF the driver may lead to increase of the set up time. The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again. To fulfill requirements of the latest ErP regulation for lighting fixtures, this LED driver can only be used behind a switch without permanently connected to the mains. This series meets the typical life expectancy of >50,000 hours of operation when Tcase, particularly (to point (or TMP, per DLC), is about 70°C or less. Please refer to the warrantly statement on MEAN WELL's website at http://www.meanwell.com The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500 12. For any application note and IP water proof function installation caution, please refer our user manual before using. https://www.meanwell.com/Upload/PDF/LED_EN.pdf 									
	9. This series meets the typical10. Please refer to the warrant11. The ambient temperature of12. For any application note an	I life expectancy statement on derating of 3.5° and IP water pro//Upload/PDF/L	ey of >50,000 l MEAN WELL C/1000m with of function ins ED_EN.pdf	s website at h fanless model tallation cautio	nttp://www.mea s and of 5°C/1 n, please refer	nwell.com 000m with fan our user man	models for op ual before usir	perating altitude		




■ BLOCK DIAGRAM

fosc: 100KHz

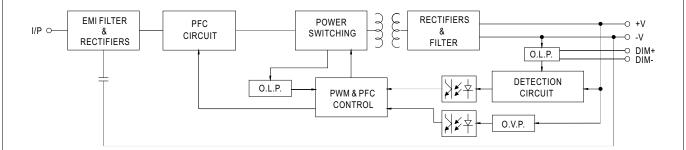

■ DRIVING METHODS OF LED MODULE

* This series works in constant current mode to directly drive the LEDs.



Typical output current normalized by rated current (%)

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEAN WELL.




■ DIMMING OPERATION

 \divideontimes 3 in 1 dimming function




- Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-:
 1 ~ 10VDC, or 10V PWM signal or resistance.
- Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
- Dimming source current from power supply: 100µA (typ.)
- O Applying additive 1 ~ 10VDC




"DO NOT connect "DIM- to -V"

O Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):





"DO NOT connect "DIM- to -V"


Applying additive resistance:



"DO NOT connect "DIM- to -V"











Note: In the case of turning the lighting fixture down to 0% brightness, please refer to the configuration as follow, or please contact MEAN WELL for other options.

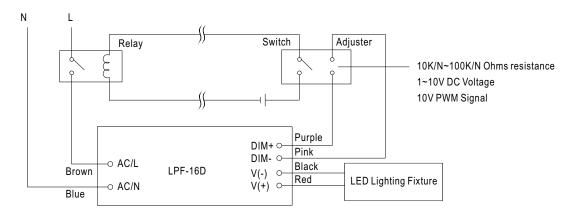


Using a switch and relay can turn ON/OFF the lighting fixture.



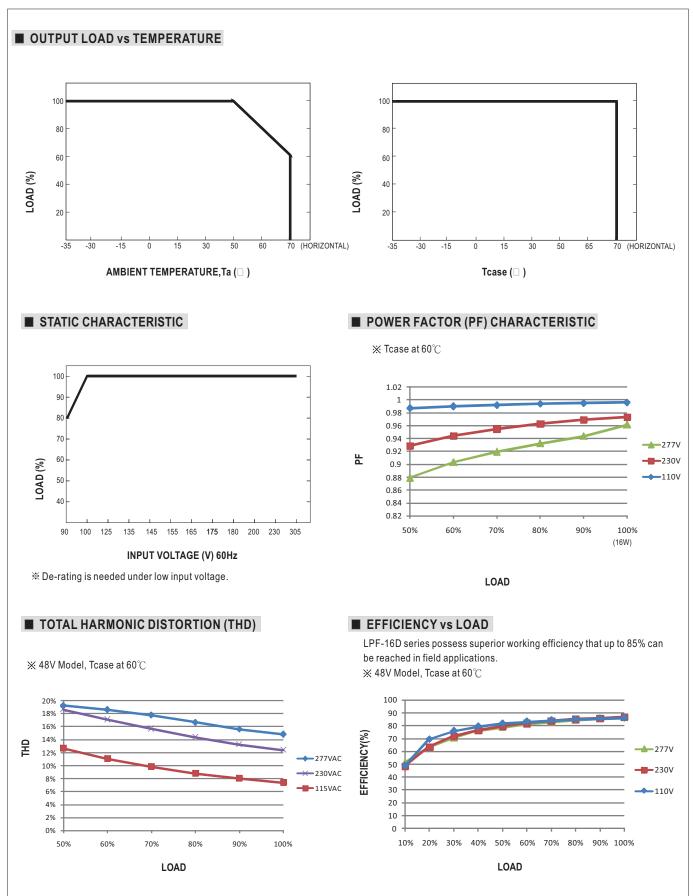




■ LIFE TIME

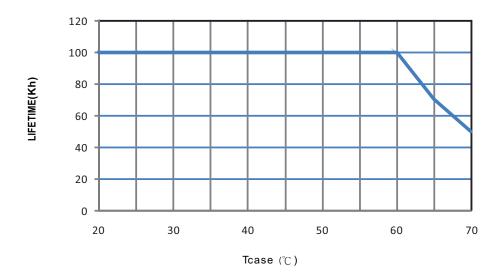



■ MECHANICAL SPECIFICATION

CASE NO.: LPF-16A Unit:mm



• (tc) : Max. Case Temperature



■ Recommend Mounting Direction



■ INSTALLATION MANUAL

Please refer to: http://www.meanwell.com/manual.html